
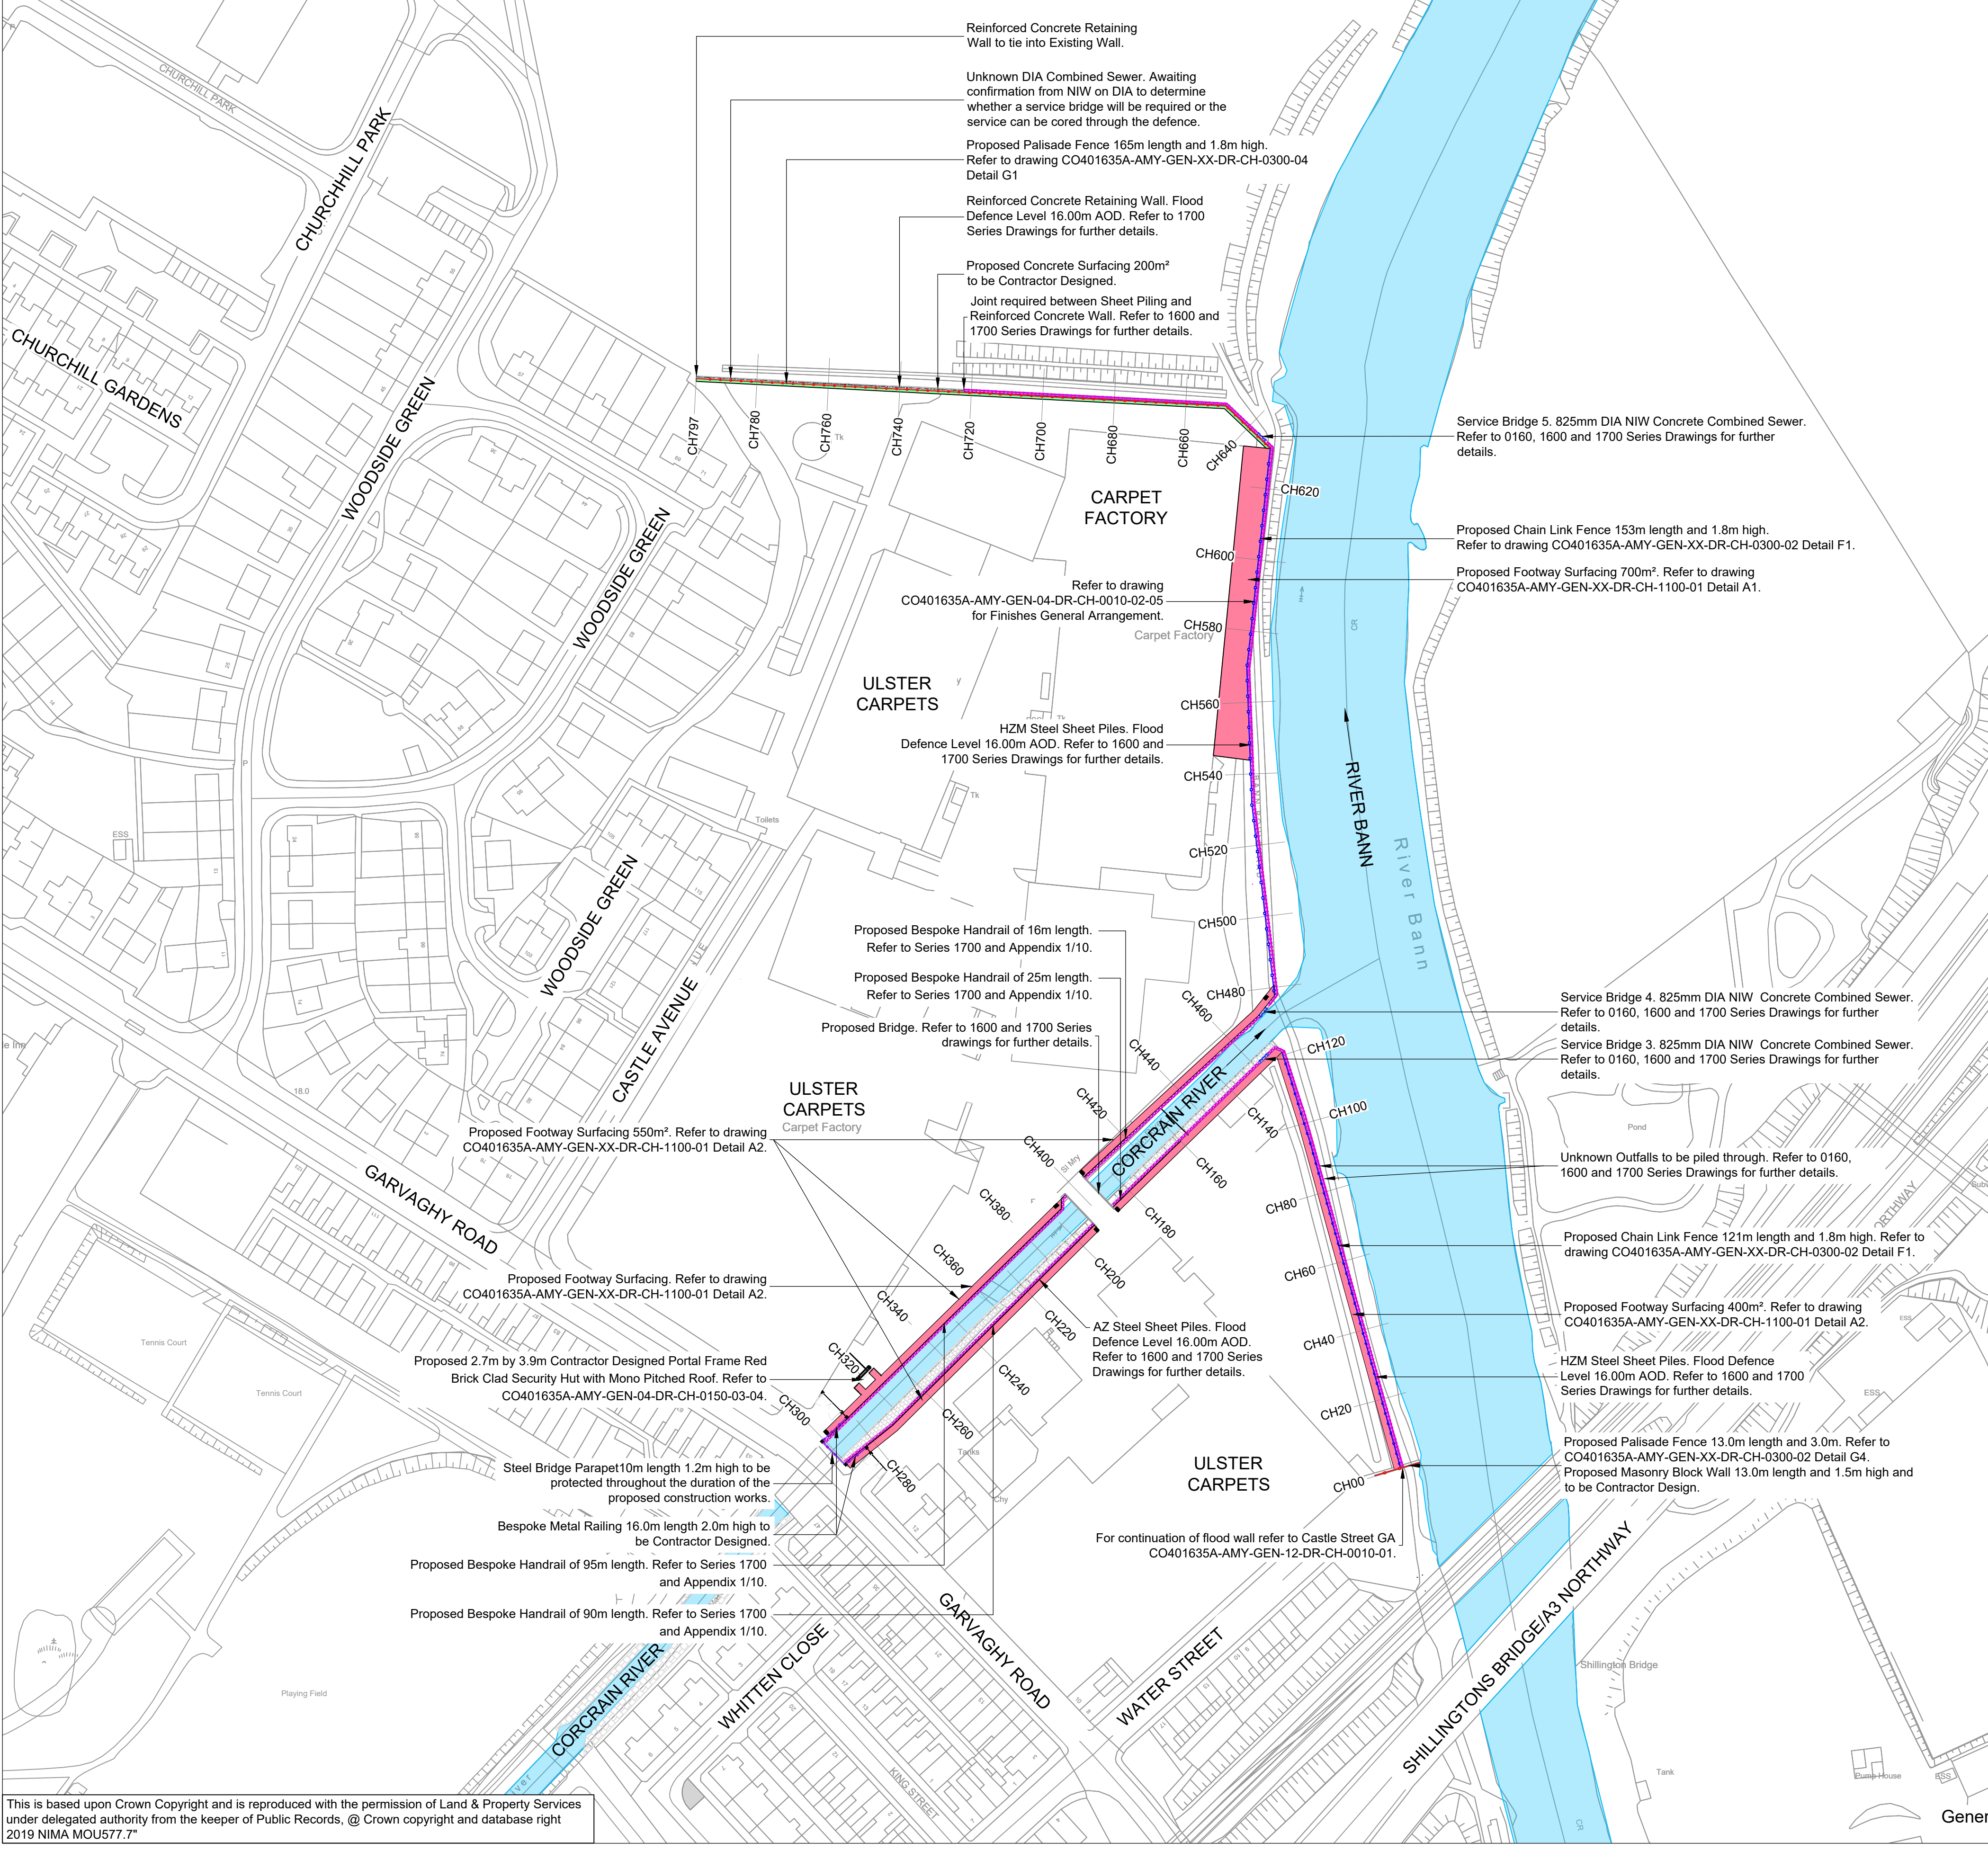


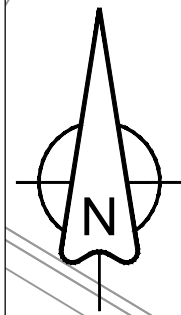

This is based upon Crown Copyright and is reproduced with the permission of Land & Property Services under delegated authority from the keeper of Public Records, @ Crown copyright and database right 2019 NIMA MOU577.7"

GENERAL NOTES

- All levels are in metres above ordnance datum unless stated otherwise.
- This drawing should be read in conjunction with all drawings as listed in Appendix 0/4.
- For further information on the residual risks and hazards, refer to Contract Data Part 1 (1 General) for matters to be included in the Early Warning Register, Scope Part C - Safety, Health and Welfare Requirements, Scope Part D - Specifications (particularly Appendix 1/23), the PCIP, Site Information and all other documents referenced within.
- The specification for the works is the Specification for Highway Works published in volume 1 of the Manual of Contract Documents for Highway Works (MCHW).
- Setting out to be agreed on site with the Project Manager / Site Supervisor.
- All residential / private access routes to be maintained at all times. Access to commence / undertake works to be arranged as per Appendix 1/7 and all other Appendices referred to within.
- The Contractor is responsible for the design, implementation and removal of all traffic management. Further details are included in Appendix 1/17.
- It is the Contractors responsibility for managing all risk associated with flooding during the construction phase (to existing level of protection).
- It will be the Contractors responsibility to ensure that all works are undertaken in line with Appendix 1/70.
- For details of the residual design hazards see pre-construction information.
- Details are shown thus- Reference Detail.
Drawing Number - Blank if shown on this drawing.
- The Contractor is responsible for locating and identifying all services prior to commencement of works. See Appendix 1/16 for further details / requirements.
- The Contractor will be responsible for site security. In accordance with Clause 302.1 and 303.1 (Vol 1 MCHW - Series 300). Temporary fencing will be provided to all properties where fencing / hedges / walls have been removed to provide the works. Refer to Appendix 3/1 for further details.
- The normal site hours are limited to between 0800-1800 Monday to Friday see Appendix 1/9 for further details. Roads and footpaths to be kept clear of mud and debris at all times as per Appendix 1/19.
- The Contractor must ensure protection to public roads during construction activities. Any damage resulting from construction activities must be rectified at the Contractors expense.
- Any necessary trimming or felling of trees shall be carried out by a specialist contractor (to the approval of the Project Manager) in accordance with BS 3998:2010 and the requirements of Series 200 - Site Clearance, the Environmental Statement / REAC and any other relevant standards, guidance or mitigation measures.

LEGEND

- Flood Defence - HZM Steel Sheet Piles
- Service Bridge - HZM Steel Sheet Piles
- Flood Defence - AZ Steel Sheet Piles
- Service Bridge - AZ Steel Sheet Piles
- Flood Defence - Reinforced Concrete Retaining Wall
- Footway Surfacing
- Concrete Surfacing
- River Bann/Corcrain River
- Bridge Parapet
- Palisade Fence
- Chain Link Fence
- Bespoke Metal Railing
- Pedestrian Guardrail
- Masonry Block Wall

Zero Code

LOOKING OUT FOR ME, YOU AND EVERYONE

To report a Close Call: 0800 121 680
To report a GSN: 0844 701 6215

RESIDUAL DESIGN HAZARDS

(The following information has been collected from Preconstruction Information and the Amey CDM Hazard Management Process.)

- Working near live traffic, pedestrians and public interaction.
- Working near/existing and/or uncharted services.
- Working in/or near water.
- Working near an operational industrial area - Ulster Carpets.
- Working near and within a floodplain.
- Capacity of existing accommodation bridge.
- Working at height.
- Working with/in deep excavations.
- Working near heavy plant machinery.
- Working with/near piling works.
- Working with/near contaminated material.
- Working with concrete.
- Working near an area prone to anti social behaviour.

C01	CMCG	CMCG	WB	JC	EMCG
	28/08/26	04/09/26	11/09/26	25/09/26	02/10/26
Revision	Revision details				
	Created	Checked	Reviewed	Approved	Authorised
	dd/mm/yy	dd/mm/yy	dd/mm/yy	dd/mm/yy	dd/mm/yy

Copyright in this design © Amey

www.amey.co.uk

Working on behalf of

DfI Rivers Headquarters
49 Tullywiggan Road
Loughry, Cookstown
BT80 8SG (028) 8676 8342

Department for Infrastructure
An Roinn
Bonneagair
Department for Infrastructure
www.infrastructure-ni.gov.uk

Project Name

Portadown
Flood Alleviation Scheme

Drawing Title

Ulster Carpets
General Arrangement

Purpose	Stage	Scale: As Shown @ A1
For Tender	NA	Dimensions: m

Drawing Number	Originator	Volume
Project		
CO401635A - AMY - GEN -		
04	-DR-CH-0010-01	
Location	Type	Role
		Number

Suitability	Suitability Description	Revision
A5	ACCEPTED - DESIGN	C01

Top of Defence Level	16.00m AOD
Type of Pile Cap	Anti Climb Contractor Designed Concrete Capping Beam.

General Arrangement
Scale 1:1000